

RICHARDS ASTROVAC™ VACUUM ASSIST NOZZLE

AstroVac™ Vacuum Assist Nozzle

Features:


- ◆ Available and easy to change replacement parts.
- ◆ Feel and ease of use similar to conventional nozzles.
- ◆ One-hand operation. Easy to locate and use hold-open clip.
- ◆ Self-serve prepay feature.



Construction/Design:

- ◆ Cast aluminum body UL listed to 50 PSI pressure.
- ◆ Duratuff® lever and lever guard.
- ◆ Inlet threads M-34 metric.
- ◆ Low product and vapor path pressure drop.
- ◆ Main poppet opens against the product flow, meeting UL Standard 842.
- ◆ Lever-actuated vapor valve.
- ◆ Environmental Compliance Device (ECD) for vapor recovery efficiency.
- ◆ Weight – 3.35 lbs.
Patent No. 5,832,970.
- ◆ 100% Factory Tested.

FLOW RATE VS. INLET PRESSURE

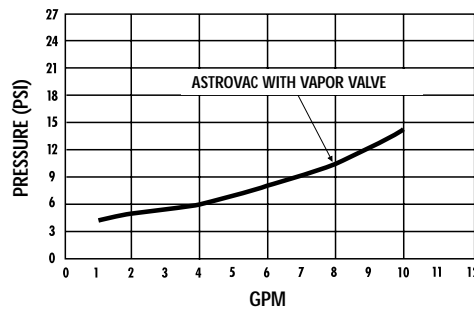

Replacement Parts

Part #	Description
3044K	Spout Kit

Certification and Listings

	Marconi	Tokheim	Catlow	Wayne
Systems Approval				
Certification Number	G-70-150	G-70-154	G-70-179	G-70-153
350 ml Test	G-70-199	G-70-199	G-70-199	G-70-199

IMPORTANT: Richards products should be used in compliance with applicable federal, state and local laws and regulations. Product selection should be based on physical specifications and limitations and compatibility with the environment and materials to be handled. Richards MAKES NO WARRANTY OF FITNESS FOR A PARTICULAR USE. All illustrations and specifications in this literature are based on the latest product information available at the time of publication. Richards reserves the right to make changes at any time in prices, materials, specifications and models and to discontinue models without notice or obligation.