


RICHARDS VA-60 AND VA-61 SINGLE USE VACUUM ASSIST BREAKAWAYS

Single use, vapor poppeted and non-vapor poppeted Vacuum-Assist Breakaways available.

Designed for those who desire single use breakaway protection on vacuum-assist systems. The VA-60 comes with a vapor poppet which seals the vapor side during separation. The VA-61 comes without a vapor poppet, in order to minimize pressure drop on the vapor side.



Features:

- ◆ Separates at 300 pounds of axial force.
- ◆ Disposable, shear-pin design.
- ◆ Durable, lightweight construction.
- ◆ Minimum vapor pressure drop.
- ◆ UL 567 listed. 
- ◆ CARB certified for all vacuum-assist systems.

Ordering Specifications


Product #	Thread	Weight	
		lbs.	kg
VA6060	M3 Metric Inverted	0.53	0.24
VA6061	M3 Metric Inverted (without vapor poppet)	0.53	0.24

Dimensions

Product #	Width		Length	
	in	mm	in	mm
VA6060	1.625	41	4.375	111
VA6061	1.625	41	4.375	111

Recommended Systems Use

	Gilbarco®	Hasstech	Wayne®Vac	MaxVac™	VaporEZ™	All Others
VA6060			•	•	•	•
VA6061	•	•				

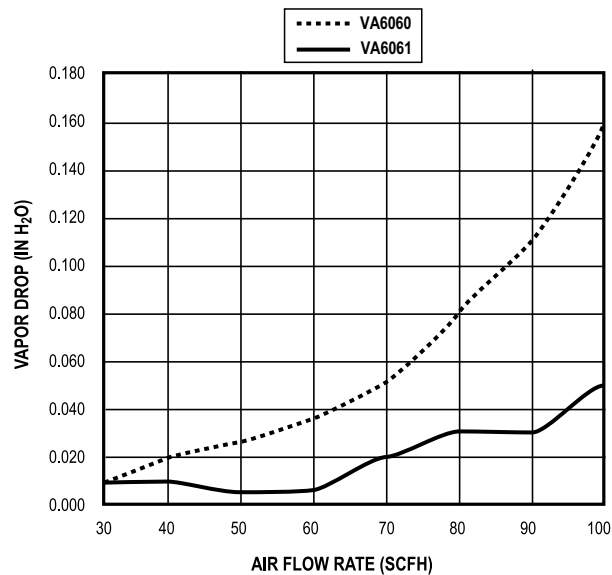

IMPORTANT: Richards products should be used in compliance with applicable federal, state and local laws and regulations. Product selection should be based on physical specifications and limitations and compatibility with the environment and materials to be handled. Richards MAKES NO WARRANTY OF FITNESS FOR A PARTICULAR USE. All illustrations and specifications in this literature are based on the latest product information available at the time of publication. Richards reserves the right to make changes at any time in prices, materials, specifications and models and to discontinue models without notice or obligation.